




RIP-RAP LINING

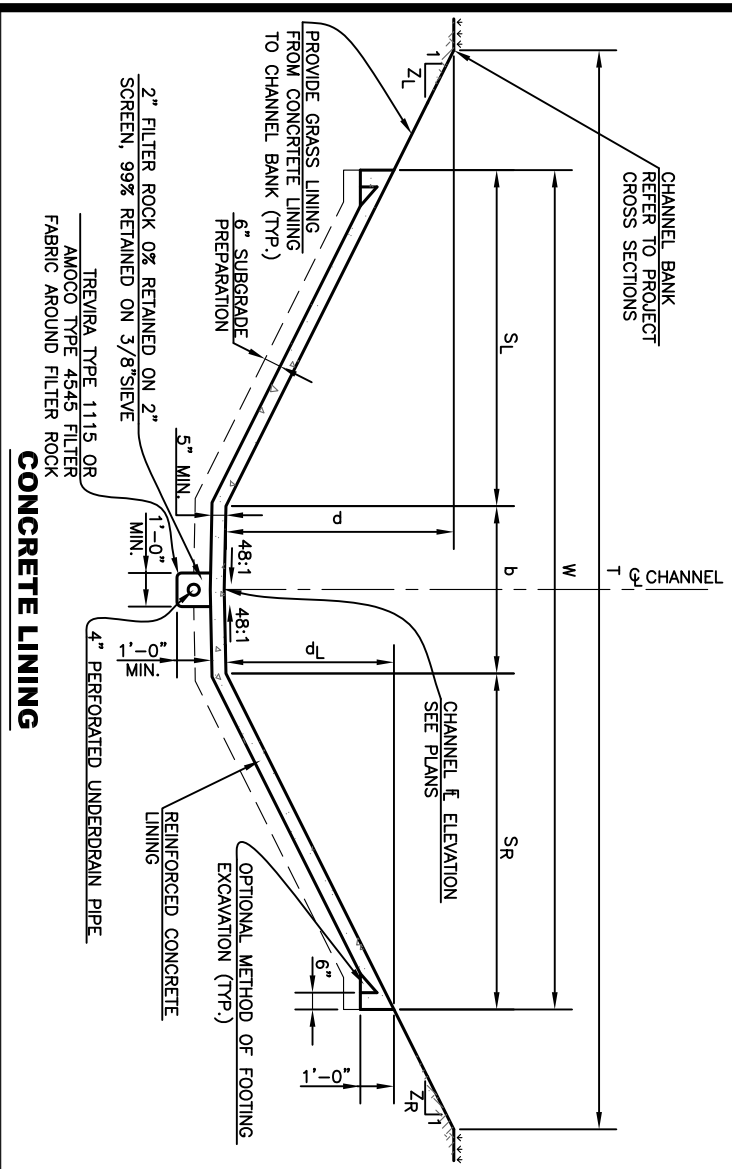


CONCRETE LINING

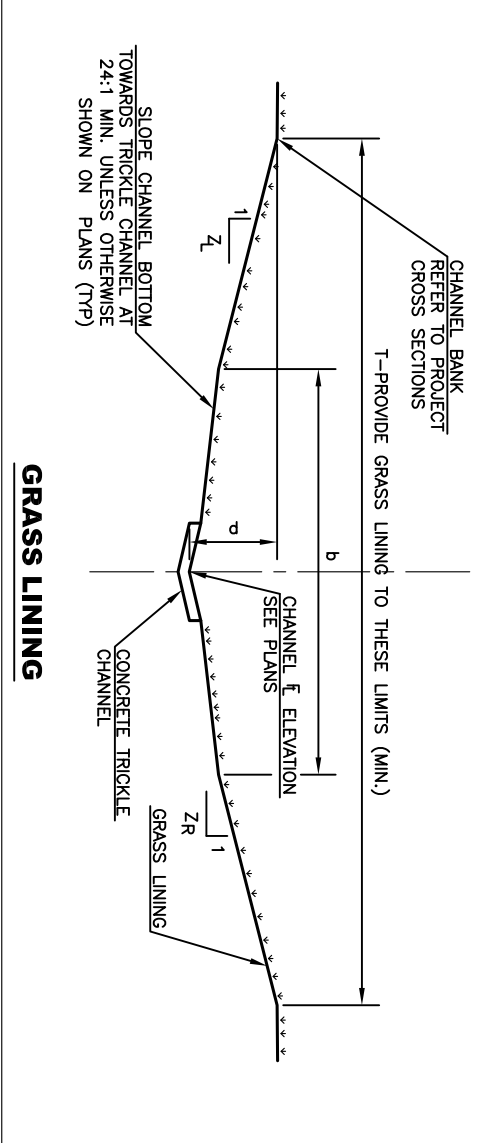

GRASS LINING

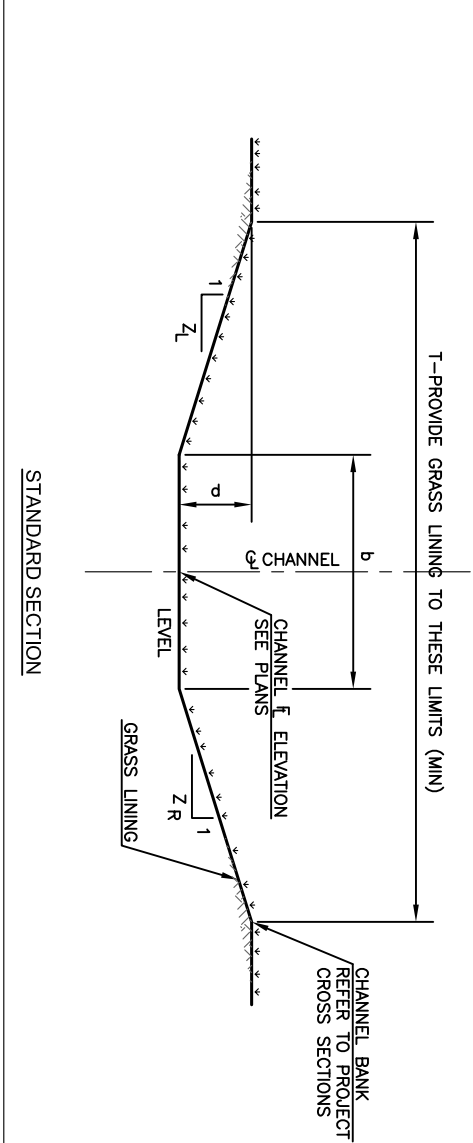

STANDARD SECTION

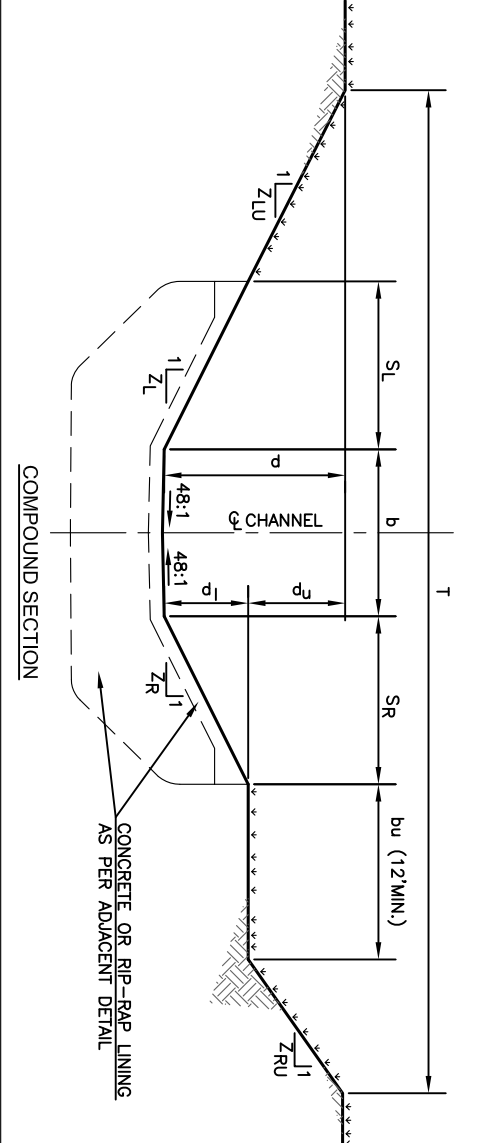

COMPOUND SECTION

NO. OR STA. FROM - TO	STANDARD SECTION				COMPOUND SECTION				*LINING				RIP-RAP LINING CLASS	RIP-RAP LINING CLASS		
	T	b	d	ZL	T	bu	du	ZLU	T	bu	du	ZLU			W	dL

OPEN CHANNEL SCHEDULE

*LINING TYPE: G = GRASS
 Gt = GRASS WITH TRICKLE CHANNEL
 R = RIP-RAP
 C = CONCRETE

CLASS	D	**GRADATION, MINIMUM PERCENTAGE LARGER THAN									
		2000lb	1400lb	700 lb	500 lb	200 lb	100 lb	60 lb	40 lb	25 lb	12 lb
I	0.50'	3' dia	2.5'dia	2' dia	1.8'dia	1.3'dia	1.0'dia	0.9'dia	0.8'dia	0.7'dia	0.5'dia
II	1.00'										100
III	2.00'	0									100

**BASED ON UNIT WEIGHT OF 165 LB/FT³ - MINIMUM UNIT WEIGHT 150 LB/FT³

RIP-RAP GRADUATION REQUIREMENTS

NOTES - RIP-RAP LININGS

1. MATERIALS USED FOR STONE RIP-RAP SHALL CONFORM TO THE REQUIREMENTS OF THE KANSAS DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS, LATEST EDITION. GRADATION FOR EACH CLASS OF RIP-RAP SPECIFIED SHALL BE IN ACCORDANCE WITH THE TABLE AT BOTTOM OF PAGE.
2. BROKEN CONCRETE RIP-RAP MAY BE SUBSTITUTED FOR STONE RIP-RAP PROVIDED IT MEETS GRADATION REQUIREMENTS FOR THE CLASS OF RIP-RAP SPECIFIED

NOTES - CONCRETE LININGS

1. ALL CONCRETE SHALL BE "PAVEMENT CLASS" IN ACCORDANCE WITH THE STANDARD SPECIFICATIONS.
2. MIXING, PLACING, FINISHING, JOINTING AND CURING OF ALL CONCRETE SHALL BE IN ACCORDANCE WITH THE APPLICABLE PORTIONS OF THE STANDARD TECHNICAL SPECIFICATIONS SECTION 5.8.b
3. WELDED WIRE FABRIC (WVF 6x6-W2.9xW2.9) SHALL BE USED THROUGHOUT AND CENTERED IN ALL SLABS AND FOOTINGS. WIRE FABRIC SHALL CONFORM TO ASTM A 185

NOTES - GRASS LININGS

1. SEEDING, FERTILIZING AND SODDING FOR GRASS LININGS SHALL BE IN ACCORDANCE WITH SECTION 4, OBSTRUCTIONS AND INCIDENTAL CONSTRUCTION OF THE STANDARD TECHNICAL SPECIFICATIONS. THE TYPE OF SEED OR SOD SHALL BE AS SPECIFIED ON THE PLANS. FESCUE SHALL BE APPLIED AT THE RATES GIVEN IN THE SPECIFICATIONS. SMOOTH-BROME OR BERMUDA GRASS SHALL BE APPLIED AS SPECIFIED BELOW.
2. TEMPORARY EROSION CONTROL MEASURES FOR GRASS LINED CHANNELS SHALL BE PROVIDED AS SPECIFIED ON THE PLANS.

TYPE OF GRASS SEED	RATES OF APPLICATION LBS./AC.	LBS./SY
SMOOTH-BROME	50	0.01
BERMUDA	70	0.014

GENERAL NOTES

1. ALL EXCAVATION, EMBANKMENT AND SUBGRADE PREPARATION REQUIRED FOR CONSTRUCTION OF OPEN CHANNELS SHALL BE IN ACCORDANCE WITH SECTION 3, EARTHWORK, OF THE STANDARD TECHNICAL SPECIFICATIONS. REFER TO THE PROJECT CROSS SECTIONS FOR EXACT LINES AND GRADES AND DETERMINATION OF EARTHWORK VOLUMES.
2. THE FOLLOWING UNITS OF MEASUREMENT SHALL APPLY TO ALL ITEMS OF WORK DETAILED ON THIS SHEET, UNLESS OTHERWISE SHOWN ON THE PROPOSAL.
 CONCRETE CHANNEL LINING: SQUARE YARD (ACTUAL EXPOSED SURFACE AREA)
 RIP-RAP CHANNEL LINING: SQUARE YARD OR ACRE
 GRASS CHANNEL LINING: SQUARE YARD OR ACRE
 4" UNDERDRAIN, IN PLACE INCLUDING FILTER ROCK AND FILTER FABRIC: LINEAR FOOT
3. REFER TO "WASH CHECK, TRICKLE CHANNEL & FLUME" STANDARD DETAIL SHEET FOR CONCRETE TRICKLE CHANNEL DETAILS.

NO. 1 Feb. 2008 Mod. Rip-Rap Note DATE: REVISION

DRAWN BY: *lm/Enc* DHS SR

APPROVED BY: *R. Chumley-Haley* BRJ, APP'D.

SHAWNEE COUNTY, KANSAS
 PUBLIC WORKS DEPARTMENT

1515 NW 54TH ST
 TOPEKA, KS 66618
 (785) 233-7702

TOPEKA
 Public Works
 ENGINEERING

620 SE MADISON ST., 2nd Floor • TOPEKA, KS 66607
 Phone: (785) 268-3842 • Fax: (785) 268-3881

STANDARD DETAILS

(DT-014)

CHANNEL LININGS

DATE: _____

SHEET: _____

PROJ.: _____